

2018

RENEGADE[®] BACKCOUNTRY

PACKAGE HIGHLIGHTS

- RAS™ 2 front suspension
- REV-XM™ platform
- tMotion™ rear suspension
- Standard electric start
- HPG™ Plus aluminum front shocks
- Pilot™ DS 2 skis
- Brembo brake with braided stainless-steel brake line
- RER™ electronic reverse
- Adjustable ski stance
- RF D.E.S.S.™ key
- REV-XP™ X seat with 5 L / 1.3 US gal of storage
- 160 mm / 6.3 in. riser block
- Stiff grab handle on handlebar

600 H.O. E-TEC[®] shown

ROTAX[®] ENGINE

600 H.O. E-TEC[®]

Engine details	Liquid-cooled, 3-D R.A.V.E.™
Cylinders	2
Displacement	594.4 cc / 36.3 in. ³
Bore	72 mm / 2.8 in.
Stroke	73 mm / 2.9 in.
Maximum engine speed	8,100 RPM
Carburation	Electronic Direct Injection
Recommended fuel type	Premium unleaded
Minimum octane	91
Fuel tank	40 L / 10.6 US gal
Oil tank capacity	3.7 L / 3.9 qt

POWERTRAIN

Drive clutch type	TRA™ III
Driven clutch type	QRS
Engagement	3,400 RPM
Small sprocket number of teeth	23
Large sprocket number of teeth	51
Drive sprocket number of teeth	8
Drive sprocket diameter	183 mm / 7.2 in.
Brake system	Brembo brake with braided stainless-steel brake line

DRY WEIGHT

215 kg / 475 lb

FEATURES

Frame	REV-XM™	Starter	Electric	Mirrors	Optional
Skis	Pilot™ DS 2	Reverse	RER™	Windshield	375 mm / 15 in.
Seating	REV-XP™ X with storage	Heated throttle lever	Standard	Runner	Square 5/16
Handlebar	Aluminum with J-hooks / Grab handle	Heated grips	Standard	Carbide configuration	102 mm / 4 in. at 90°
Riser block height	160 mm / 6.3 in.	Gauge	Analog with display	Hitch	Optional

COLOR

White / Orange Crush Black 

DIMENSIONS

Vehicle overall length	3,226 mm / 127 in.
Vehicle overall width	1,159 or 1,204 mm / 45.6 or 47.4 in.
Vehicle overall height	1,210 mm / 47.6 in.
Ski stance	975 mm or 1,019 mm / 38.4 or 40.1 in.
Ski overall length	1,040 mm / 41 in.
Track nominal width	406 mm / 16 in.
Track nominal length	3,705 mm / 146 in.
Track profile height	40.6 mm / 1.6 in. Cobra FlexEdge™

SUSPENSION

Front suspension	RAS™ 2
Front shock	HPG™ Plus
Front suspension max. travel	210 mm / 8.3 in.
Rear suspension	tMotion™
Center shock	HPG™
Rear shock	HPG™
Rear suspension max. travel	239 mm / 9.4 in.



600 H.O. E-TEC® shown




600 H.O. E-TEC® shown

FEATURE HIGHLIGHTS



iMotion™ rear suspension

A swiveling rear arm and split front arm allow the skid to flex laterally for more predictable carving. More rising-rate motion ratio adds capacity and comfort.

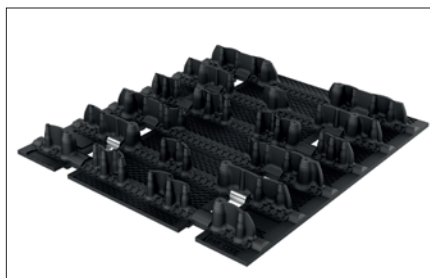

Cobra FlexEdge™ 16 x 146 x 1.6 in. track

This track features combination of flexible cupped lugs for superior off-trail performance and more rigid lugs for added traction on hard-packed snow. FlexEdge™ technology reduces the length of the fiberglass reinforcing rods to only 12 in. (31 cm) wide, enabling the edges to flex – reducing the effort to initiate roll-up.



Running boards with large opening

Footings is solid with running board snow evacuation holes increased by 87% over the REV-XP™. The running board edge extrusion – with aggressive boot grips – is three times stronger than the REV-XP™.



LinQ™ cargo system (option)

Our cargo attachment system is the hassle-free way to connect cargo bags or a fuel caddy to your sled in seconds.



Analog gauge with display

GAUGE FEATURES

Speedometer	Standard
Tachometer	Standard
Fuel	Standard
Engine temperature	Optional